




Tee Equal (10s) EN10253-2 - seamless

SCH10S , 304L / 316L

Material P235GH, P265GH, 16Mo3

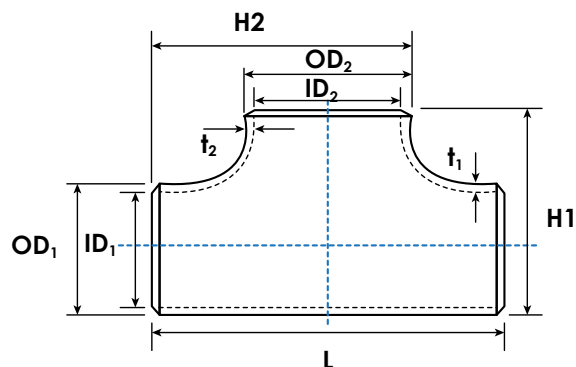

Size	Outside Diameter (OD1, OD2)	Inside Diameter (ID1, ID2)	Wall Thickness (t1, t2)	Height (H1, H2)	Approximate Weight (Kg)	L
	Nom.	Nom.	Nom.	Nom.		Nom.
½"	21.34	17.12	2.11	35.67	0.1	50
¾"	26.67	22.45	2.11	42.34	0.15	58
1"	33.4	27.86	2.77	54.7	0.3	76
1¼"	42.16	36.62	2.77	69.08	0.49	96
1½"	48.26	42.72	2.77	81.13	0.68	114
2"	60.33	54.79	2.77	94.17	1.01	128
2½"	73.03	66.93	3.05	112.52	1.47	152
3"	88.9	82.8	3.05	130.45	2.02	172
3½"	101.6	95.5	3.05	145.8	2.55	190
4"	114.3	108.2	3.05	162.15	3.18	210
5"	141.3	134.5	3.4	194.65	4.97	248
6"	168.28	161.48	3.4	227.14	6.81	286
8"	219.08	211.56	3.76	287.54	11.77	356
10"	273.05	264.67	4.19	352.53	19.19	432
12"	323.85	314.71	4.57	415.93	28.54	508
14"	355.6	346.04	4.78	456.8	35.66	558
16"	406.4	396.84	4.78	508.2	44.11	610
18"	457.2	447.44	4.78	571.5	55.88	686
20"	508	496.92	5.54	635	77.32	762
22"	558.8	547.92	5.54	698.5	93.67	838
24"	609.6	597.3	6.35	737	115.52	864

GENERAL NOTE:


- 1) All dimension are in millimetres
- 2) Dimension tolerance are followed by ASME B16.9



Tee Equal (40s) EN10253-2 - seamless

SCH40S , 304L / 316L

Material P235GH, P265GH, 16Mo3

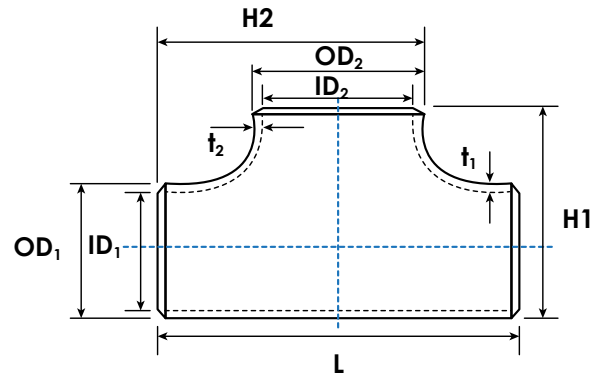

Size	Outside Diameter (OD ₁ , OD ₂)	Inside Diameter (ID ₁ / ID ₂)	Wall Thickness (t ₁ / t ₂)	Height (H ₁ , H ₂)	Approximate Weight (Kg)	L
	Nom.	Nom.	Nom.	Nom.		Nom.
½"	21.34	15.8	2.77	35.67	0.12	50
¾"	26.67	20.96	2.87	42.34	0.18	58
1"	33.4	26.64	3.38	54.7	0.33	76
1¼"	42.16	35.04	3.56	69.08	0.57	96
1½"	48.26	40.9	3.68	81.13	0.81	114
2"	60.33	52.51	3.91	94.15	1.19	128
2½"	73.03	62.71	5.16	112.52	2.09	152
3"	88.9	77.92	5.49	130.45	3.02	172
3½"	101.6	90.12	5.74	145.8	3.95	190
4"	114.3	102.26	6.02	162.15	5.11	210
5"	141.3	128.2	6.55	194.65	7.97	248
6"	168.28	154.06	7.11	227.14	11.69	286
8"	219.08	202.72	8.18	287.54	21.22	356
10"	273.05	254.51	9.27	352.53	35.62	432
12"	323.85	304.79	9.53	415.93	51.05	508
14"	355.6	336.54	9.53	456.8	61.78	558
16"	406.4	387.34	9.53	508.2	76.55	610
18"	457.2	437.94	9.53	571.5	97.1	686
20"	508	488.94	9.53	635	120.17	762
22"	558.8	-	-	-	-	-
24"	609.6	590.94	9.53	737	161.45	864

GENERAL NOTE:

1) All dimension are in millimetres

2) Dimension tolerance are followed by ASME B16.9