




ASME B16.9 (Short Radius) - seamless
SCH10S / SCH40S , 304L / 316L

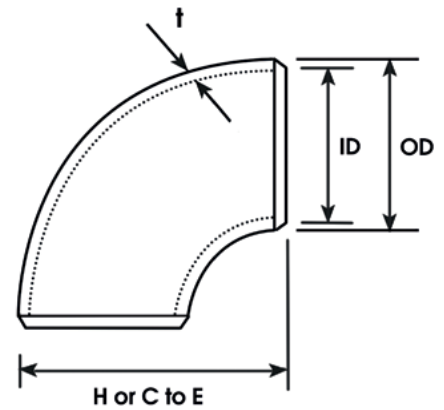

Size	Outside Diameter (OD)	10s			40s			Height (H) / C to E
		Inside Diameter (ID)	Wall Thickness (t)	Approximate Weight (Kg)	Inside Diameter (ID)	Wall Thickness (t)	Approximate Weight (Kg)	
	Nom.	Nom.	Nom.		Nom.	Nom.		
1"	33.4	27.86	2.77	0.1	26.64	3.38	0.18	41.7
1¼"	42.16	36.62	2.77	0.17	35.04	3.56	0.21	53.1
1½"	48.26	42.72	2.77	0.22	40.9	3.68	0.29	62.15
2"	60.33	54.79	2.77	0.31	52.51	3.91	0.51	81.15
2½"	73.03	66.93	3.05	0.52	62.71	5.16	1.02	100.5
3"	88.9	82.8	3.05	0.77	77.92	5.49	1.5	120.45
3½"	101.6	95.5	3.05	1.38	90.12	5.74	2.06	139.8
4"	114.3	108.2	3.05	1.72	102.26	6.02	3.12	159.15
5"	141.3	134.5	3.4	2.78	128.2	6.55	5.28	197.65
6"	168.28	161.48	3.4	4.15	154.06	7.11	7.94	236.15
8"	219.08	211.56	3.76	8	202.72	8.18	17.06	312.55
10"	273.05	264.67	4.19	15.88	254.51	9.27	28.58	390.5
12"	323.85	314.71	4.57	18.14	304.79	9.53	36.29	466.9
14"	355.6	346.04	4.78	23.59	336.54	9.53	45.81	533.8
16"	406.4	396.84	4.78	30.84	387.34	9.53	59.42	609.2
18"	457.2	447.44	4.78	39.01	437.94	9.53	79.38	685.5
20"	508	496.92	5.54	64.86	488.94	9.53	97.52	762
22"	558.8	547.92	5.54	76.38	-	-	-	838.5
24"	609.6	597.3	6.35	91.63	590.94	9.53	136.99	915

GENERAL NOTE:

- 1) All dimension are in millimeteres
- 2) Dimension tolerance are followed by ASME B16.9