



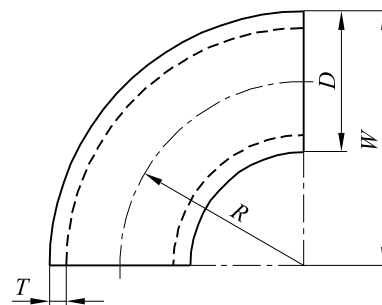


Standard	DN	D	T	R	B	O	W	m
		mm	mm (SCH)	mm	mm	mm	mm	Kg
EN 10253-2	600	610	8.8	914			1219	188.10
EN 10253-2	600	610	10	914			1219	213.30
EN 10253-2	600	610	11	914			1219	234.25
EN 10253-2	600	610	12.5	914			1219	269.70
EN 10253-2	600	610	14.2	914			1219	302.20
EN 10253-2	600	610	16	914			1219	337.90
EN 10253-2	600	610	17.5	914			1219	368.60
EN 10253-2	700	711	8	1067			1422	233.41
EN 10253-2	700	711	8.8	1067			1422	256.50
EN 10253-2	700	711	10	1067			1422	291.00
EN 10253-2	700	711	11	1067			1422	319.57
EN 10253-2	700	711	12.5	1067			1422	368.00
EN 10253-2	700	711	14.2	1067			1422	410.65
EN 10253-2	700	711	16	1067			1422	458.12
EN 10253-2	700	711	17.5	1067			1422	503.68
EN 10253-2	700	711	20	1067			1422	573.56

GENERAL NOTE:


- 1) All dimension are in millimeteres
- 2) Dimension tolerance are followed by EN-10253-2

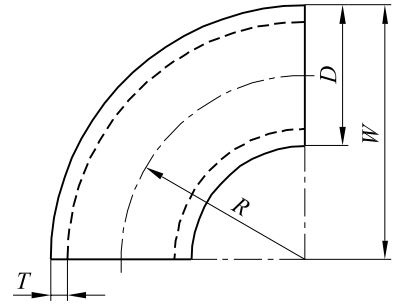


Standard	DN	D	T	R	B	O	W	m
		mm	mm (SCH)	mm	mm	mm	mm	Kg
EN 10253-2	750	762	8	1143			1524	265.52
EN 10253-2	750	762	8.8	1143			1524	294.68
EN 10253-2	750	762	10	1143			1524	334.33
EN 10253-2	750	762	11	1143			1524	367.27
EN 10253-2	750	762	12.5	1143			1524	416.52
EN 10253-2	750	762	14.2	1143			1524	472.09
EN 10253-2	750	762	16	1143			1524	530.65
EN 10253-2	750	762	17.5	1143			1524	579.24
EN 10253-2	750	762	20	1143			1524	659.76
EN 10253-2	800	813	8	1219			1626	305.35
EN 10253-2	800	813	8.8	1219			1626	335.55
EN 10253-2	800	813	10	1219			1626	380.75
EN 10253-2	800	813	11	1219			1626	418.29
EN 10253-2	800	813	12.5	1219			1626	474.50
EN 10253-2	800	813	14.2	1219			1626	537.82
EN 10253-2	800	813	16	1219			1626	604.63
EN 10253-2	800	813	17.5	1219			1626	660.07
EN 10253-2	800	813	20	1219			1626	752.00

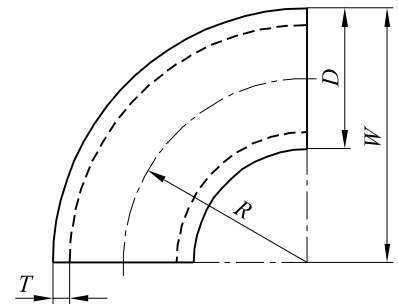

Standard	DN	D	T	R	B	O	W	m
		mm	mm (SCH)	mm	mm	mm	mm	Kg
EN 10253-2	850	864	8	1296			1728	341.78
EN 10253-2	850	864	8.8	1296			1728	379.37
EN 10253-2	850	864	10	1296			1728	430.50
EN 10253-2	850	864	11	1296			1728	473.00
EN 10253-2	850	864	12.5	1296			1728	545.00
EN 10253-2	850	864	14.2	1296			1728	608.30
EN 10253-2	850	864	16	1296			1728	683.95
EN 10253-2	850	864	17.5	1296			1728	746.75
EN 10253-2	850	864	20	1296			1728	850.91
EN 10253-2	900	914	8	1372			1829	386.79
EN 10253-2	900	914	8.8	1372			1829	425.10
EN 10253-2	900	914	10	1372			1829	482.42
EN 10253-2	900	914	11	1372			1829	530.08
EN 10253-2	900	914	12.5	1372			1829	601.36
EN 10253-2	900	914	14.2	1372			1829	681.86
EN 10253-2	900	914	16	1372			1829	766.76

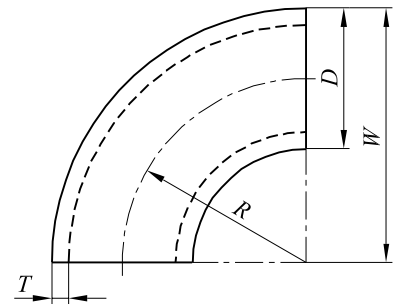

Standard	DN	D	T	R	B	O	W	m
		mm	mm (SCH)	mm	mm	mm	mm	Kg
EN 10253-2	900	914	17.5	1372			1829	837.24
EN 10253-2	900	914	20	1372			1829	954.17
EN 10253-2	1000	1016	8	1524			2032	478.02
EN 10253-2	1000	1016	8.8	1524			2032	525.40
EN 10253-2	1000	1016	10	1524			2032	596.33
EN 10253-2	1000	1016	11	1524			2032	655.31
EN 10253-2	1000	1016	12.5	1524			2032	743.56
EN 10253-2	1000	1016	14.2	1524			2032	843.26
EN 10253-2	1000	1016	16	1524			2032	948.44
EN 10253-2	1000	1016	17.5	1524			2032	1,035.80
EN 10253-2	1000	1016	20	1524			2032	1,180.81
EN 10253-2	1050	1067	8	1600			2134	527.24
EN 10253-2	1050	1067	8.8	1600			2134	579.53
EN 10253-2	1050	1067	10	1600			2134	657.80
EN 10253-2	1050	1067	11	1600			2134	722.90
EN 10253-2	1050	1067	12.5	1600			2134	820.32
EN 10253-2	1050	1067	14.2	1600			2134	930.38
EN 10253-2	1050	1067	16	1600			2134	1,046.52
EN 10253-2	1050	1067	17.5	1600			2134	1,143.00
EN 10253-2	1050	1067	20	1600			2134	1,303.20

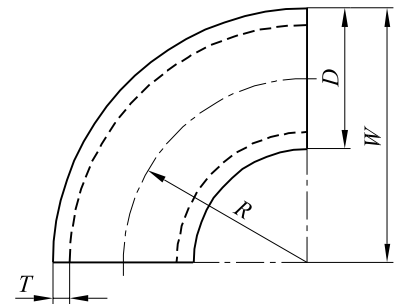

Standard	DN	D	T	R	B	O	W	m
		mm	mm (SCH)	mm	mm	mm	mm	Kg
EN 10253-2	1100	1118	8	1677			2236	579.25
EN 10253-2	1100	1118	8.8	1677			2236	636.70
EN 10253-2	1100	1118	10	1677			2236	722.75
EN 10253-2	1100	1118	11	1677			2236	794.30
EN 10253-2	1100	1118	12.5	1677			2236	901.40
EN 10253-2	1100	1118	14.2	1677			2236	1,022.40
EN 10253-2	1100	1118	16	1677			2236	1,150.10
EN 10253-2	1100	1118	17.5	1677			2236	1,256.25
EN 10253-2	1100	1118	20	1677			2236	1,432.45
EN 10253-2	1200	1219	8.8	1829			2438	758.30
EN 10253-2	1200	1219	10	1829			2438	860.80
EN 10253-2	1200	1219	11	1829			2438	946.10
EN 10253-2	1200	1219	12.5	1829			2438	1,073.80
EN 10253-2	1200	1219	14.2	1829			2438	1,218.10
EN 10253-2	1200	1219	16	1829			2438	1,370.50
EN 10253-2	1200	1219	17.5	1829			2438	1,497.10
EN 10253-2	1200	1219	20	1829			2438	1,707.40