



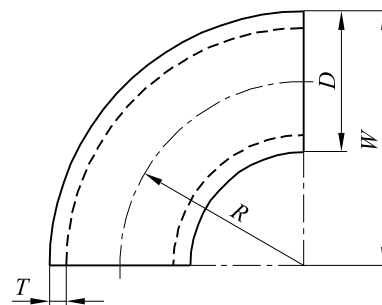

Standard	DN	D	T	R	O	K	m
		mm	mm	mm	mm	mm	Kg
EN 10253-2	600	610	8.8	610		914	125.53
EN 10253-2	600	610	10	610		914	142.40
EN 10253-2	600	610	11	610		914	156.33
EN 10253-2	600	610	12.5	610		914	180.00
EN 10253-2	600	610	14.2	610		914	201.00
EN 10253-2	600	610	16	610		914	225.50
EN 10253-2	600	610	17.5	610		914	246.00
EN 10253-2	600	610	20	610		914	280.00
EN 10253-2	700	711	8	711		1066	155.53
EN 10253-2	700	711	8.8	711		1066	170.90
EN 10253-2	700	711	10	711		1066	194.00
EN 10253-2	700	711	12.5	711		1066	241.50
EN 10253-2	700	711	14.2	711		1066	274.00
EN 10253-2	700	711	16	711		1066	307.50
EN 10253-2	700	711	17.5	711		1066	335.60
EN 10253-2	700	711	20	711		1066	382.20

GENERAL NOTE:

- 1) All dimension are in millimeters
- 2) Dimension tolerance are followed by EN-10253-2

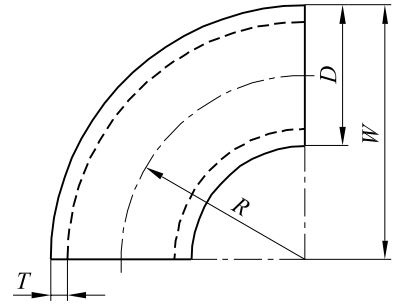

Standard	DN	D	T	R	O	K	m
		mm	mm	mm	mm	mm	Kg
EN 10253-2	800	813	8	813		1220	203.65
EN 10253-2	800	813	8.8	813		1220	223.80
EN 10253-2	800	813	10	813		1220	254.00
EN 10253-2	800	813	11	813		1220	279.00
EN 10253-2	800	813	12.5	813		1220	316.42
EN 10253-2	800	813	14.2	813		1220	358.70
EN 10253-2	800	813	16	813		1220	403.25
EN 10253-2	800	813	17.5	813		1220	440.23
EN 10253-2	800	813	20	813		1220	501.53
EN 10253-2	900	914	8	914		1371	257.70
EN 10253-2	900	914	8.8	914		1371	283.20
EN 10253-2	900	914	10	914		1371	321.40
EN 10253-2	900	914	11	914		1371	353.15
EN 10253-2	900	914	12.5	914		1371	400.60
EN 10253-2	900	914	14.2	914		1371	454.25
EN 10253-2	900	914	16	914		1371	510.80
EN 10253-2	900	914	17.5	914		1371	557.75
EN 10253-2	900	914	20	914		1371	635.65
EN 10253-2	1000	1016	8	1016		1524	318.70
EN 10253-2	1000	1016	8.8	1016		1524	350.30
EN 10253-2	1000	1016	10	1016		1524	397.60
EN 10253-2	1000	1016	11	1016		1524	437.00
EN 10253-2	1000	1016	12.5	1016		1524	495.70
EN 10253-2	1000	1016	14.2	1016		1524	562.20
EN 10253-2	1000	1016	16	1016		1524	632.30
EN 10253-2	1000	1016	17.5	1016		1524	690.50
EN 10253-2	1000	1016	20	1016		1524	787.20
EN 10253-2	1200	1219	8	1219		1830	459.35
EN 10253-2	1200	1219	8.8	1219		1830	505.00
EN 10253-2	1200	1219	10	1219		1830	573.25
EN 10253-2	1200	1219	11	1219		1830	630.00
EN 10253-2	1200	1219	12.5	1219		1830	715.00
EN 10253-2	1200	1219	14.2	1219		1830	811.20
EN 10253-2	1200	1219	16	1219		1830	912.65
EN 10253-2	1200	1219	17.5	1219		1830	997.00
EN 10253-2	1200	1219	20	1219		1830	1,137.00